



Flexographic Printing Press



PREMIA



SOMA
CONNECTION



EFFICIENCY
FEATURES



QUALITY
FEATURES

The PREMIA model offers a unique combination of features and technology usually reserved for high performance, top of the range flexographic printing presses.

Technical Parameters

› Printing decks	8	› Sleeve technology	yes
› Print width	820/1050/1270/1450 mm 32.3 / 41.3 / 50 / 57"	› Roll diameter	1000 mm 39.4
› Print length	300-915 mm 11.8-36"	› Speed	390 / 500 m/min 1279 / 1640 fpm
› Printed materials	LD PE, HD PE/PP, CPP, BOPP, PET, OPA, paper, film laminate		

E INK READY ANILOX SLEEVE EXCHANGE

06



E FAST BLADE EXCHANGE



Q FAST ADAPT SELF-ADAPTING CHAMBER SETTING



Q INKFLOW ELITE INK PUMPING




E SHAFT-LESS NON-STOP FLYING SPLICE

01, 15



Q CDT'S CENTRAL DRUM THERMAL STABILISATION

07



E AUTOMATIC CENTRAL DRUM CLEANING SYSTEM




Q PCTS PRINTING CYLINDER THERMAL STABILISATION



E SLEEVE PUSH-OFF DEVICE



Q SLEEVED LAY-ON AND SPREADER ROLLERS

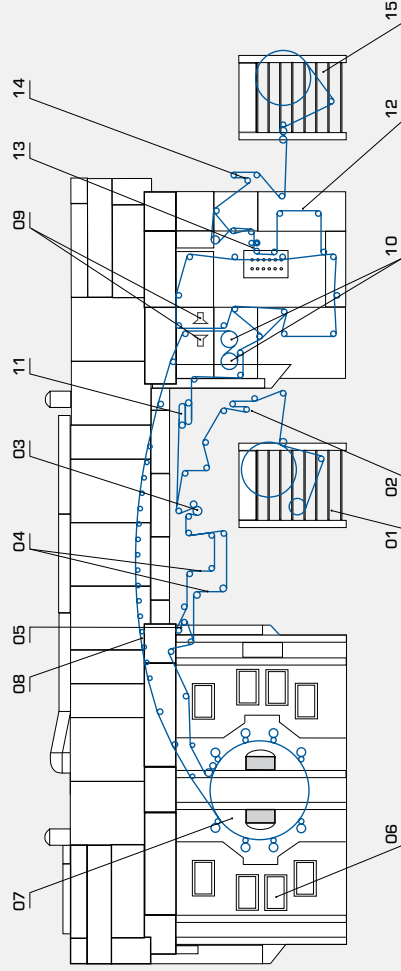

- 01 Non-stop unwind
- 02 Unwind tension control
- 03 Corona treatment + infeed unit
- 04 Web guiding system

- 05 Front/back in-register setting system
- 06 Ink ready anilox sleeve exchange
- 07 Central drum thermal stabilisation unit
- 08 Main drying tunnel

- 09 Web viewing system
- 10 Cooling cylinders
- 11 Turning bars
- 12 Web guiding system

- 13 Slitting unit
- 14 Rewind tension control
- 15 Non-stop rewind